

Project Case Study

TOTAL
CONSTRUCTION

Concept to Completion

Project

Self Storage Facility

Location

Brookvale, NSW

Client

Kennards Self Storage

Project cost

\$7 million

Completion

August 2004



Project Case Study

**TOTAL
CONSTRUCTION**

Concept to Completion

Project

Self Storage Facility

Location

Brookvale, NSW

Client


Kennards Self Storage

Project cost

\$7 million

Completion

August 2004

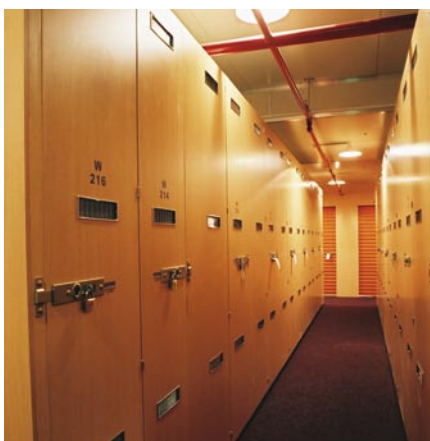

Total Construction designed and constructed this new facility for Kennards Self Storage in 2004. Design was by MCHP Architects.

The development comprises a basement level covering almost the whole site (approx 3800m²) with two separate buildings above. These three-storey and two-storey buildings house approximately 1000 self storage units including temperature and humidity controlled wine storage with capacity for expansion. The exterior premium metallic Colorbond finish, architectural sails and Bondor finish on the road frontage, make it a flagship store for Kennards Self Storage.

This was a complex project, as the finished basement level is well below the natural water table. The solution was a secant pile wall on all boundaries. This massive undertaking involved two piling rigs working continuously for three months. The basement slab was laid over a Voltex membrane to ensure a completely watertight building.

Another success was a fire engineered solution for a Type A construction which significantly reduced construction costs by approximately \$1 million and contributed towards the completion date being ahead of program.

Sydney
Melbourne
Adelaide

Level 2, 3 George St - PO Box 212 - North Strathfield NSW 2137
Level 1, 21 Cremorne St - PO Box 2169 - Richmond South VIC 3121
62 North Terrace - PO Box 746 - Kent Town BC SA 5071

T 02 9746 9555 **F** 02 9746 9588
T 03 9417 4744 **F** 03 9417 7011
T 08 8363 1133 **F** 08 8363 6766

www.totalconstruction.com.au